



The product shown may differ from standard configuration.

## MAXIMO® BASIC

Standard Seat with Mechanical Suspension



# MAXIMO® BASIC

## Technical Data

### Standard Seat

In order for a seat with mechanical suspension to be truly comfortable, it must be precisely adjusted to the user’s weight. In the Maximo Basic, this is accomplished with an easy-to-use lever. Ideal for drivers of standard tractors, this seat model comes with suspension travel of 100 mm, a fore/aft isolator, and three-position height adjustment to ensure a comfortable ride.



Mechanical suspension



Mechanical lumbar support



Manual weight adjustment



Fore/aft isolator

### Features



| ARTICLE NO.                                     |         |
|-------------------------------------------------|---------|
| Fabric                                          | 1288549 |
| STANDARD FEATURES                               |         |
| 1 Armrests, 65 x 270 mm                         | ●       |
| Shock absorber, nonadjustable                   | ●       |
| Mechanical suspension                           | ●       |
| Suspension stroke, 100 mm                       | ●       |
| 2 Weight adjustment, manual, 50-130 kg          | ●       |
| 3 Height adjustment, 80 mm, 3-step (mechanical) | ●       |
| 4 Fore/aft adjustment 210 mm                    | ●       |

### MAXIMO® BASIC

|                                |        |
|--------------------------------|--------|
| 5 Fore/aft isolator, lockable  | ●      |
| 6 Lumbar support, mechanical   | ●      |
| 7 Adjustable backrest angle    | ●      |
| Seat cushion width             | 480 mm |
| OPTIONAL FEATURES              |        |
| Document box                   | ○      |
| Integrated backrest extension  | ○      |
| Restraint system               | ○      |
| Lateral suspension             | ○      |
| Seat heating                   | ○      |
| Operator presence switch (OPS) | ○      |

### MAXIMO® BASIC

### Measurements (installation dimensions)

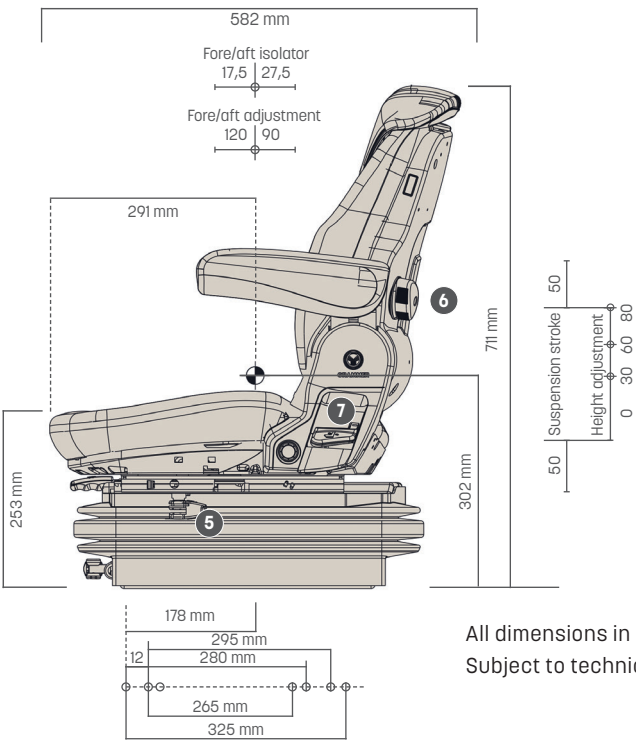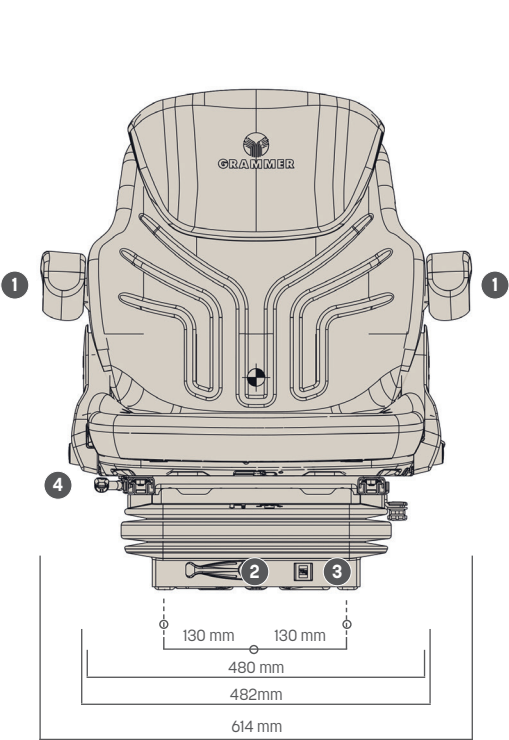

All dimensions in mm.  
Subject to technical changes.